


29811 FUEL LEVEL GAUGE - GM
 29812 FUEL LEVEL GAUGE - FORD/CHRYSLER
 29813 FUEL LEVEL GAUGE - AMC/STEWART WARNER

INSTALLATION INSTRUCTIONS

MOUNTING

To mount the gauge in an instrument panel, first drill a 2-9/16" hole in the panel, then insert the gauge into the hole and secure with the included mounting hardware.

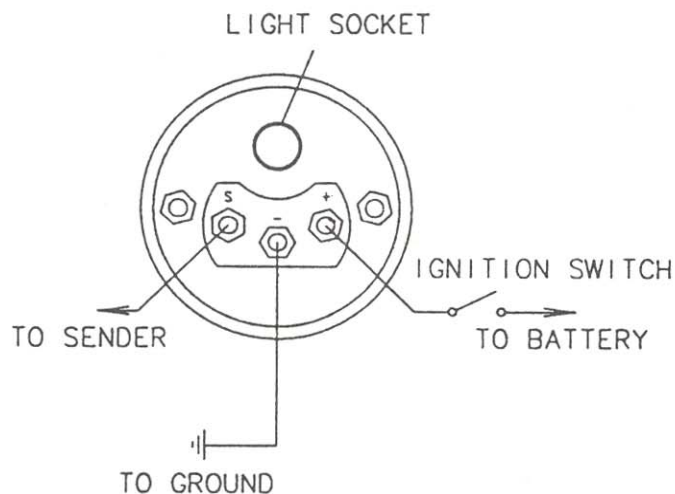

NOTE: Disconnect the negative battery cable during gauge installation.

WIRING

To wire the gauge, 18 gage wire (minimum) is recommended. Use eyelet type terminals with insulated shanks to avoid the possibility of short circuits.

Some gauges may require a brief warm-up before accurate operation.

NOTE: When routing the wiring, avoid sharp edges, moving moving parts and hot engine components.

LIGHTING

To install lighting in the gauge, insert bulb and socket into the lighting hole in the back of the gauge and connect the red wire to the vehicle's existing lighting circuit.

NOTE: If the gauge is placed in a plastic or wooden instrument panel, connect the black wire to ground.

Printed In Taiwan